


Bacchus 75 Glare-free Trimless Downlight IP54

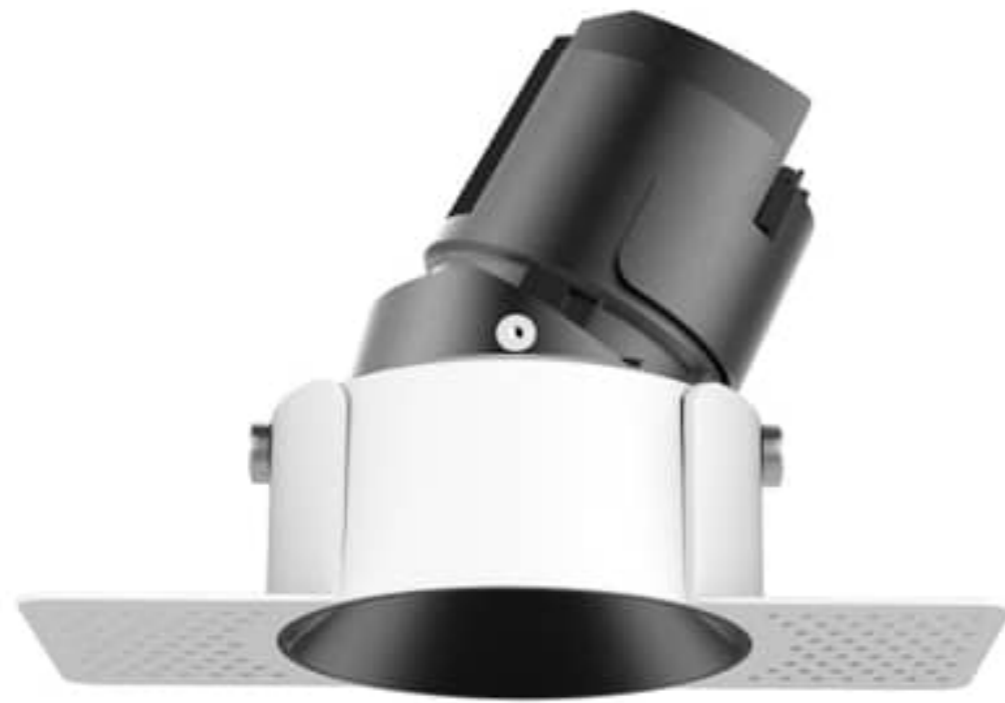

Product Code	LUD-CL36L-Trimless-5
Type	Ceiling mounted
Light Source	5W, 8W, 12W dedicated Phosphor LED, non-replaceable
Colour Temperature/ CRI	2700K, 3000K, 4000K, CRI 80 or CRI 92
Optic	5W 8W 11°, 18°, 24°, 36°, 50°, 12W 18°, 24°, 36°, 50°
Body	Die cast aluminium adjustable housing, powder coat finish, polycarbonate optic, steel sprung mounting clips
Dimmable	5W Non-dimable, 8W or 12W TRIAC Dimming, 1-10V and Dali dimmable Upon Request Only
Finish	Metallica Black, Gold, Chrome, Silver Bezel and body
SDCM/L 70 B10	< 3/ 50,000 hours
Bezel Diameter	Trimmed: 85mm x 85mm
Weight	0.98KG excluding driver
IP	54
Adjustability	360° horizontal axis, 30° vertical axis
Cut Out	Trimmed: 75mm x 75mm
Lumen Package	5W 3000K CRI92 400lm, 8W 3000K CRI92 640lm, 12W 3000K CRI92 960lm
Depth	90mm installation depth required for 5W and 8W. 110mm installation depth required for 12W
Driver	Remote driver included