






PRODUCT LINE DRAWING

				
Φ35mm RECESSED	Φ45mm RECESSED	Φ55mm RECESSED	Φ65mm RECESSED	Φ75mm RECESSED

INSTALLATION STATEMENT

1. Read the manual carefully before installation.
2. Have the installation done by a professional electrician.
3. To avoid electric shock, ensure the power is turned off before installation or maintenance.
4. Under no circumstances should the luminaire be covered by thermal pads or similar materials, and there must be at least 100mm of space around the product.
5. If you notice any abnormalities such as smoke or peculiar smell, please cut off the power immediately and have it inspected, repaired or replaced by a professionally qualified person.
6. Keep the manual for future reference.




IP20




CE




1. AS SHOWN IN THE FIGURE, OPEN A SUITABLE INSTALLATION HOLE ON THE CEILING (PLEASE REFER TO THE LAMP BODY LABEL FOR SPECIFIC HOLE SIZE).

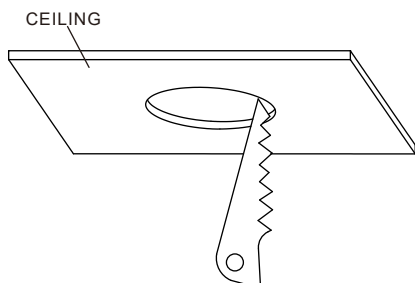

2. CONNECT THE INPUT END OF THE DRIVER TO AC200-240V 50/60Hz.

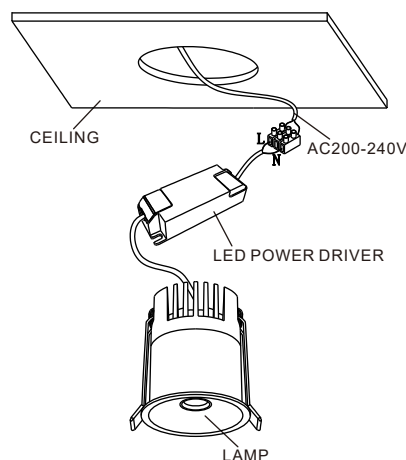

3. PINCH THE SPRINGS ON BOTH SIDES OF THE LED LAMP, PUSH THE LAMP BODY UPWARDS INTO THE OPENING IN THE CEILING, AND ENSURE THAT THE LAMP IS SECURELY INSTALLED.

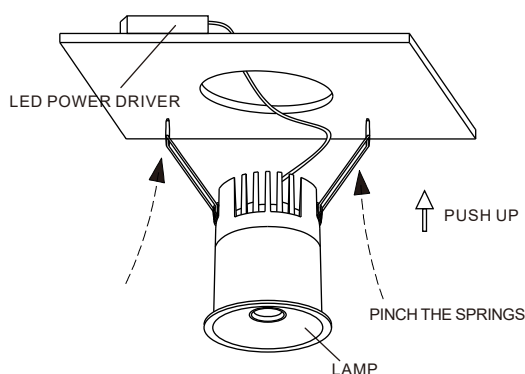

4. ENSURE THAT THE WIRING IS CORRECT AND CAN BE USED WHEN POWERED ON.

