

Lucretia Poster LED Display Series

Pixel Pitch: P1.53 / P1.86 / P2 / P2.5



Features



Patented Private Mold Design

Die-cast aluminium cabinet with excellent flatness and high precision

Cabinet Thickness

63mm


Net Weight

50 kgs


Seamless Quick-Connect Design



Precisely align with positioning pins and tighten using a hex key as indicated. Multiple units can be seamlessly connected to form a large display. Simple and efficient installation, delivering a clean and impactful large-screen effect.

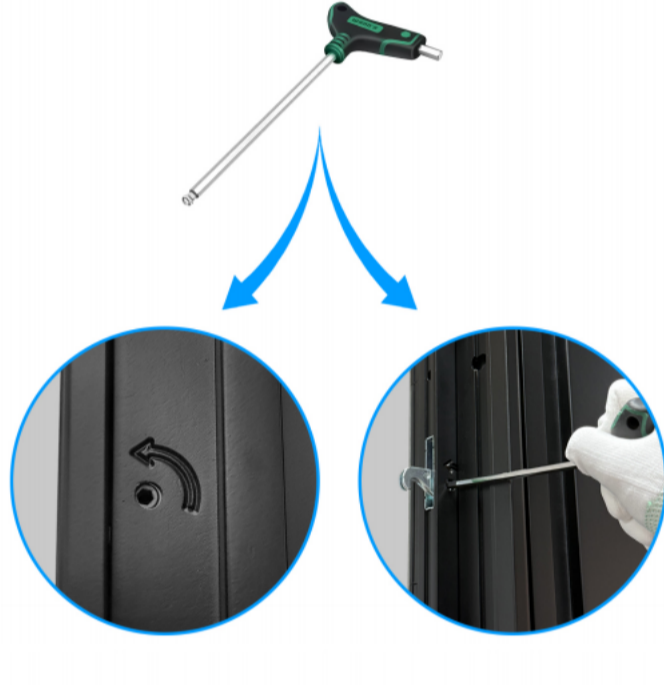

Edge Protection Design for LED Modules

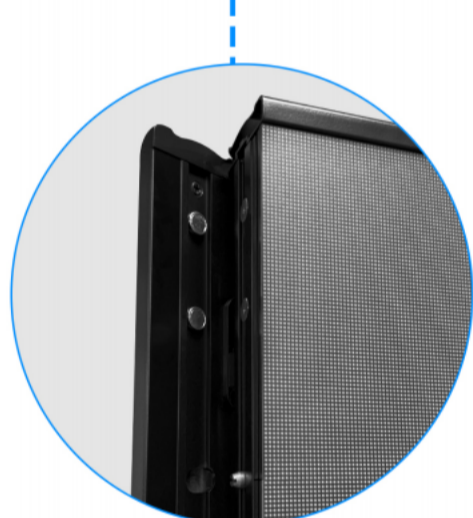

Protective edge structure prevents damage to corner LEDs during handling and transportation.



Integrated Wheels & Base Support Design



Stable Base Structure
Reinforced bottom bracket ensures enhanced stability during operation.



Height-Adjustable
Casters
Universal wheels with adjustable height provide stability on uneven surfaces while allowing smooth and flexible movement.

Various installation support



Specification

Pixel Pitch	P1.53	P1.86	P2	P2.5	Unit
Module Size	320*160	320*160	20*160	320*160	mm
Scan mode	1/52	1/43	1/40	1/32	scan
Led	SMD 1212	SMD 1515	SMD 1515	SMD 2121	
Brightness	600	600	750	750	nits
Cabinet Size (W*H*D)	640*1920*63	640 1920*63	640*1920*63	640*1920 63	mm
Cabinet Resolution	418 1255	344*103	320*960	256*768	dots
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	
Cabinet Weight	50	50	50	50	kgs
Density	524590	355008	307200	196 08	dots
Maintenance way	Front Access	Front Access	Front Access	Front Access	
Refresh Rate	1920/3840/76 0	1920/3840/7680	1920/3840/7680	1920/3840/7680	hz/s
Viewing Angle	160/160	160/160	160/160	160/160	deg
Max/Avg Power consumption	400/200	400/200	400/200	400 2 0	w/m ²
Gray Scale	14-16	14-16	14-16	14 6	bits
Contrast Ratio	4000: 1	4000: 1	4000: 1	4000: 1	
IP Grade	IP31	IP31	IP31	IP31	