




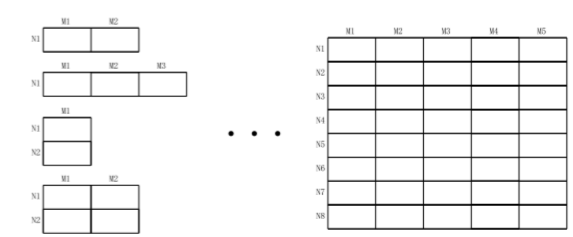


## Ultra-thin PT Series

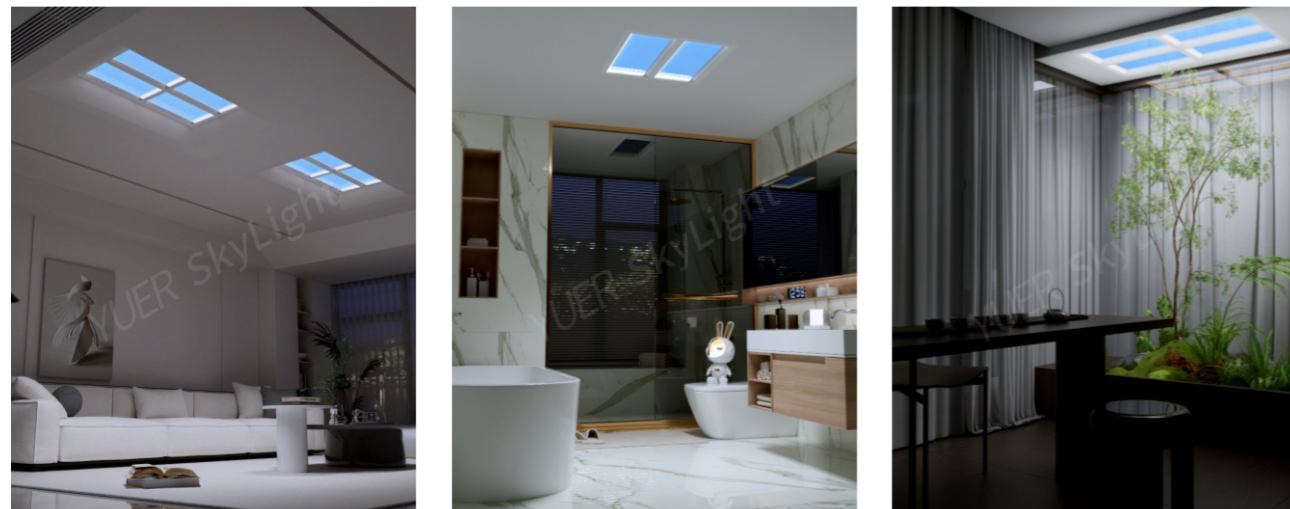




## Specification

Ultra-thin [PT Series]			☒
Installation	/	Recessed	
Luminous Flux	>2500Lm	Maximum customized size for keel is 2.4x3.0m Combination from 2pcs and up to 40pcs 	
Power	40W		
Voltage	100-240V		
Color Temperature	2100-7500K		
Control	Mesh5.0/Dali/0-10V		
Frame Color	Pearl White		
CRI	93Ra		
Lifespan	30000H		
Certificate	CCC CE ROHS		
(MM) Dimension	L582*W282*H36		
Cutout Size	Used in combination with keel		
(MM) Sky Size	L527*W227		
Net Weight	2.6KG		

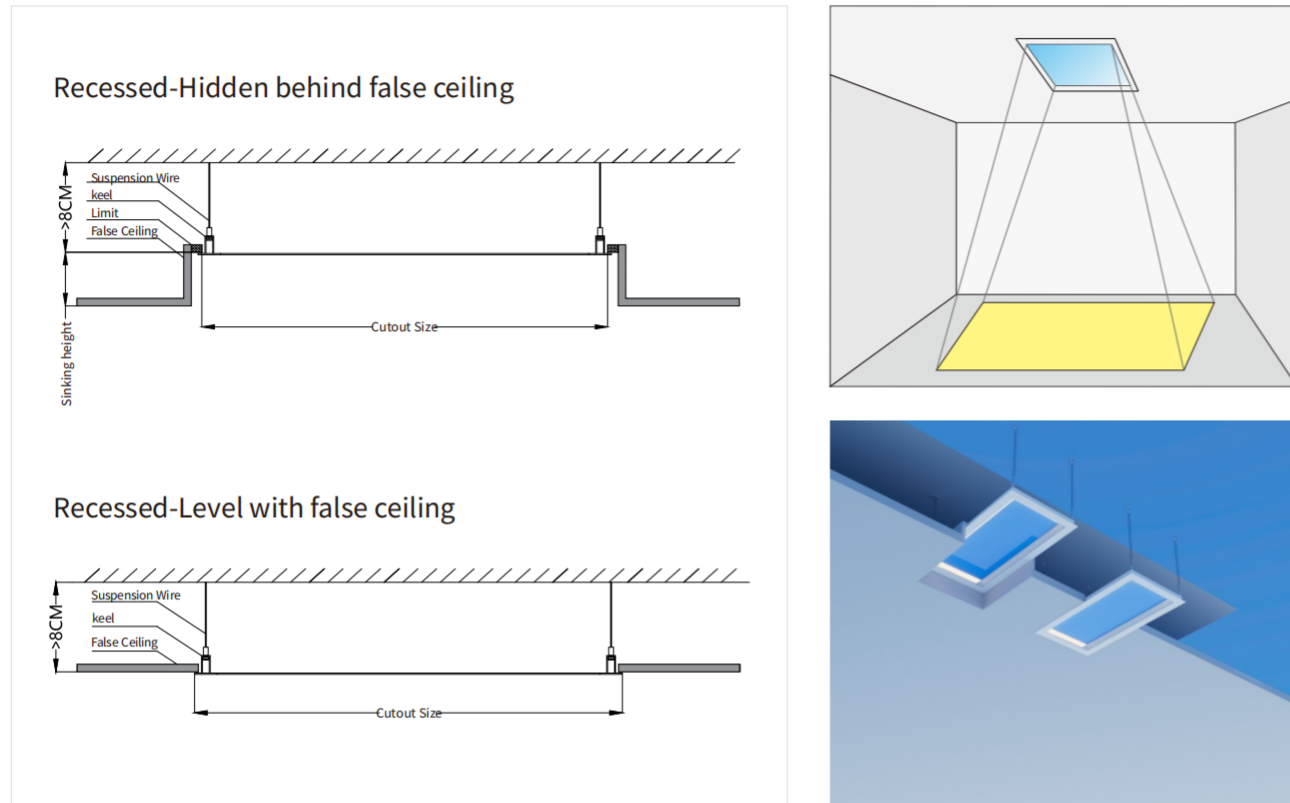

The data of power, current and lumens output is calculated at 12:00 under auto mode.

## Ultra-thin PL Series

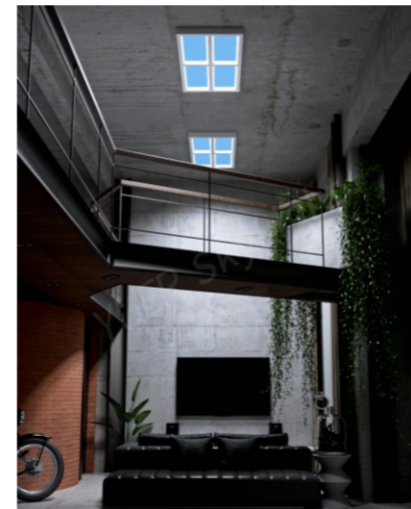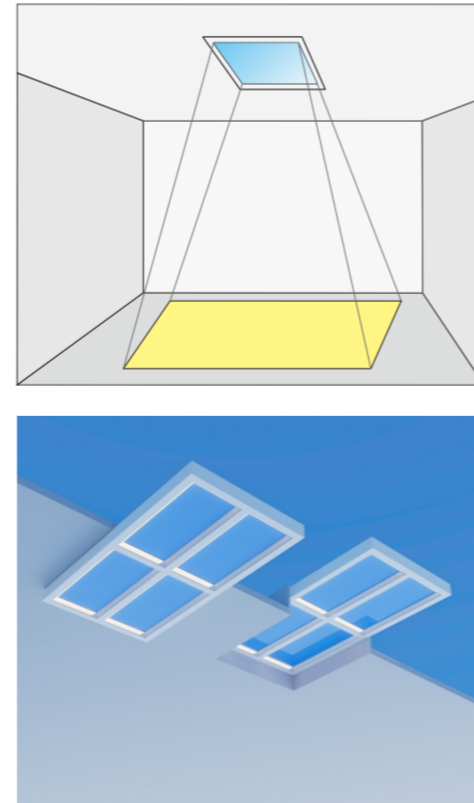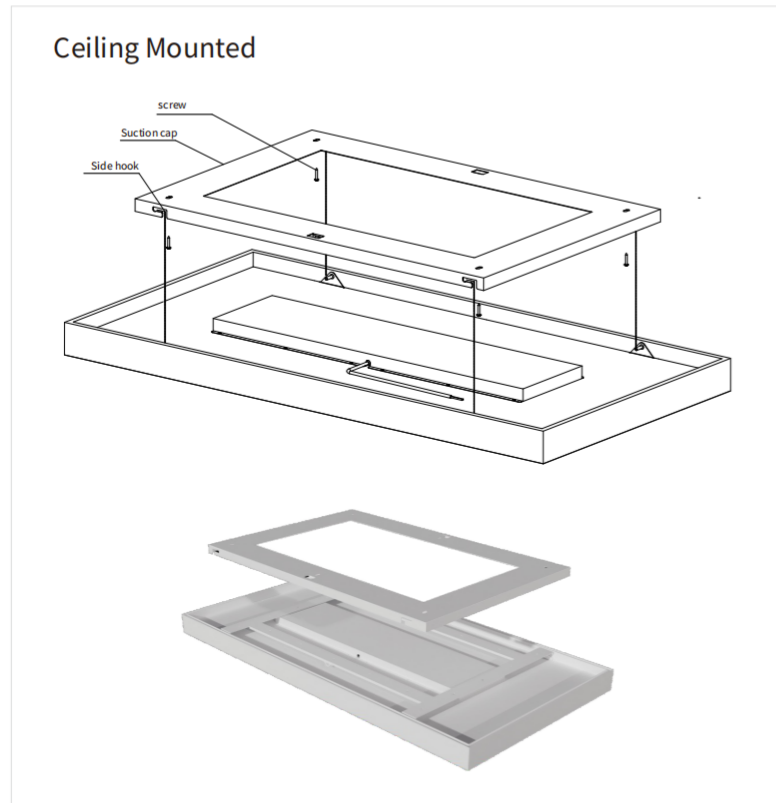



## Specification

Ultra-thin 【PL Series】	 P-22L
Installation	Ceiling mounted
Luminous Flux	>10000Lm
Power	160W
Voltage	100-240V
Color Temperature	2100-7500K
Control	Mesh5.0/Dali/0-10V
Frame Color	White
CRI	95Ra
Lifespan	30000H
Certificate	CCC CE ROHS
(MM) Dimensio	L1236*W636*H70
(MM) SkySize	4*(L527*W227)
Net Weight	16KG

The data of power, current and lumens output is calculated at 12:00 under auto mode.

# Lucretia

## Ultra-thin PX Series

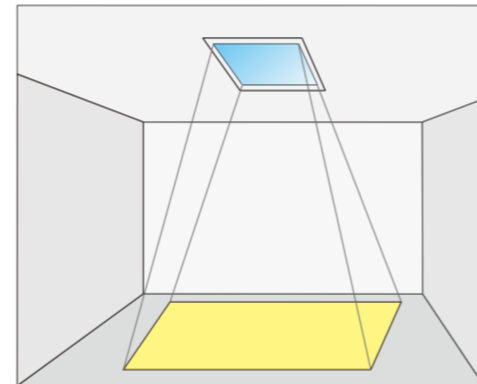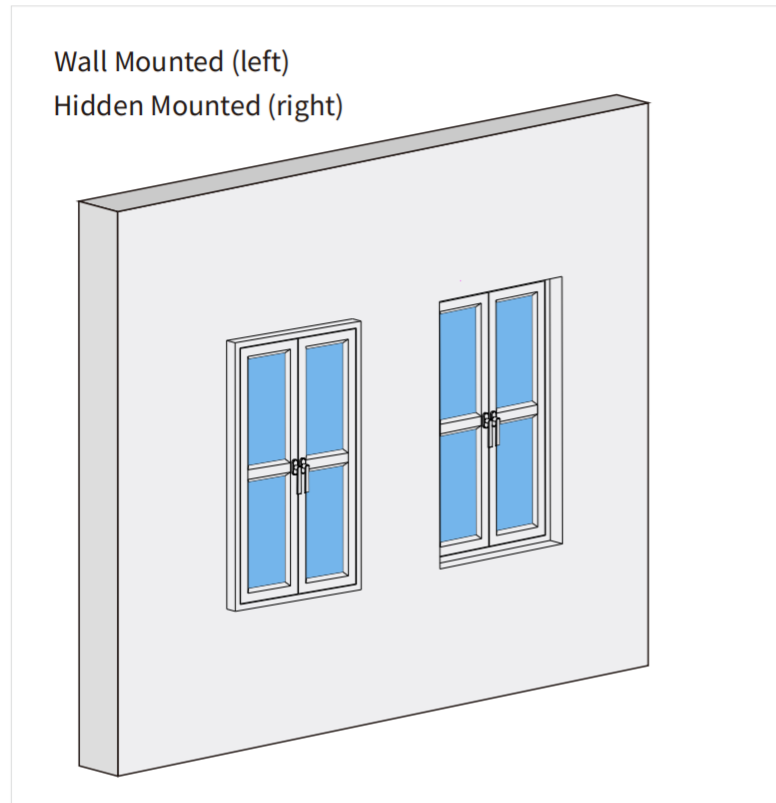

## Specification



P-22X

Ultra-thin 【PX Series】	
Installation	Wall Mounted
Luminous Flux	>10000Lm
Power	160W
Voltage	100-240V
Color Temperature	2100-7500K
Control	Mesh5.0/Dali/0-10V
Frame Color	White
CRI	95Ra
Lifespan	30000H
Certificate	CCC CE ROHS
(MM) Dimension	L1332*W781*H66
(MM) Sky Size	4*(L527*W227)
Net Weight	30KG

The data of power, current and lumens output is calculated at 12:00 under auto mode.