



BEAM 75 Adjustable Beam Architectural Downlight

The BEAM 75 is a versatile architectural downlight by Lucretia, featuring an adjustable 10°–50° beam angle, precision optics and flexible on-site beam control to deliver adaptable accent and general lighting solutions for premium architectural spaces.

Are you a professional and your project needs some support?


BOOK A CONSULTATION WITH US

Main Specifications



Type: Adjustable Beam Architectural Downlight	Control Options: Non-Dimmable, TRIAC, DALI and Casambi
Power Options: 10W	Input Voltage: 220–240V AC, 50/60Hz
Luminous Flux: 700 lm	Dimensions: Ø85 × H88 mm
Luminaire Efficacy: Up to 70 lm/W	Cut-Out: Ø75 mm
Colour Temperature: 2700K / 3000K / 4000K (Custom CCT Available)	Construction: Die-cast Aluminium Housing
Colour Rendering: CRI >90 (CRI >95 Available)	Material: Die-cast Aluminium
Colour Consistency: SDCM <3	Ingress Protection: IP20
Beam Angle: 10°–50° Adjustable	Installation: Recessed
Optical System: Precision Adjustable Beam Optical System	Customisation: Custom CCT, CRI and Control Options Available
Glare Control: Low Glare Optical Design	Warranty: 5-Year Warranty
Reflector Finishes: Matte White, Matte Black	Applications: Residential, Hospitality, Retail, Galleries, Museums, Offices and Commercial Interiors.



Dimensions

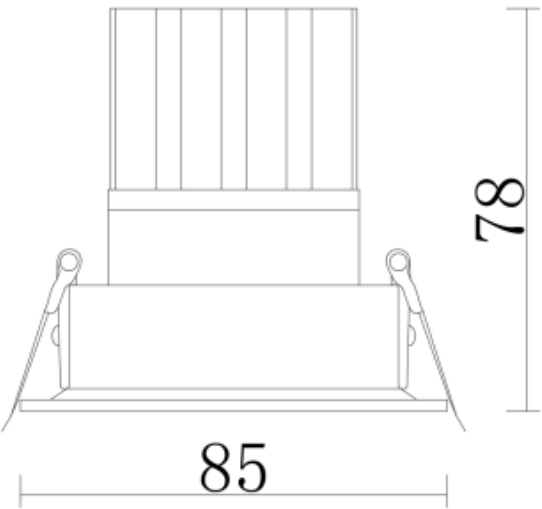

Light Distribution Curve

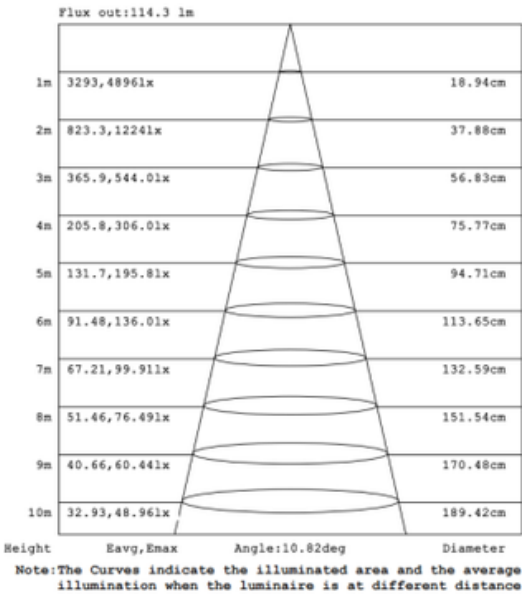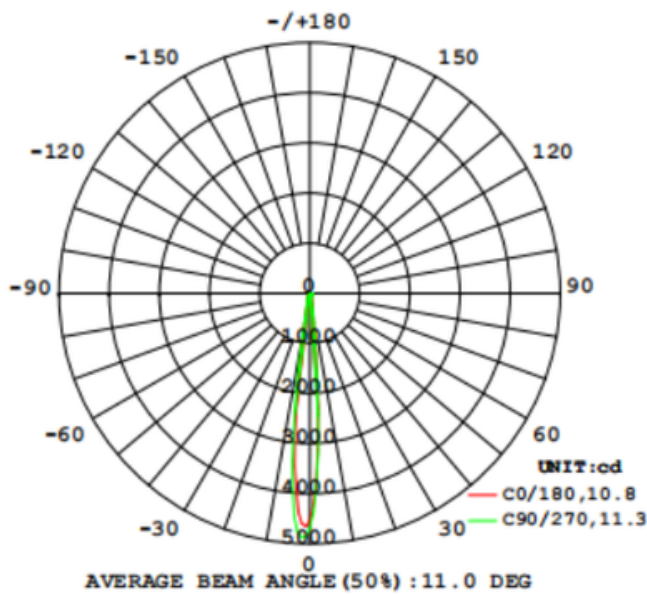

Power: 10W
Beam angle: 10°
Luminous flux: 358lm
Central light intensity: 4905cd

