



Essential 120 General Architectural Downlight

The Essential 120 is a powerful architectural downlight by Lucretia, delivering comfortable UGR<19 general illumination, smooth light distribution and refined reflector finishes for reliable, high-quality lighting across residential, hospitality and commercial spaces.

Are you a professional and your project needs some support?


BOOK A CONSULTATION WITH US

Main Specifications


Type: General Architectural Downlight	Control Options: Non-Dimmable, TRIAC, DALI and Casambi
Power Options: 20W	Input Voltage: 220–240V AC, 50/60Hz
Luminous Flux: 1800 lm	Dimensions: Ø139 × H60 mm
Luminaire Efficacy: Up to 90 lm/W	Cut-Out: Ø120 mm
Colour Temperature: 2700K / 3000K / 4000K (Custom CCT Available)	Construction: Die-cast Aluminium Housing
Colour Rendering: CRI >90 (CRI >95 Available)	Material: Die-cast Aluminium
Colour Consistency: SDCM <3	Ingress Protection: IP44
Beam Angle: 60°	Installation: Recessed
Optical System: Uniform Illumination Optical System	Customisation: Custom CCT, CRI, Reflector Finish and Control Options Available
Glare Control: UGR <19	Warranty: 5-Year Warranty
Reflector Finishes: Matte Silver, Chrome, Gold, Gunmetal and Matte Black	Applications: General Lighting for Residential, Hospitality and Commercial Interiors



Dimensions

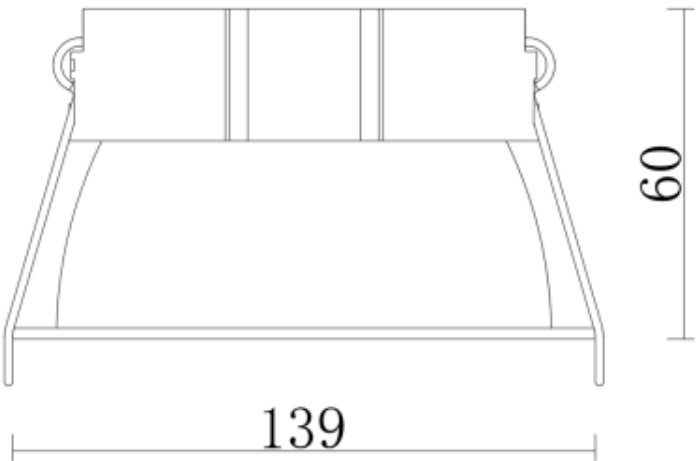

Light Distribution Curve

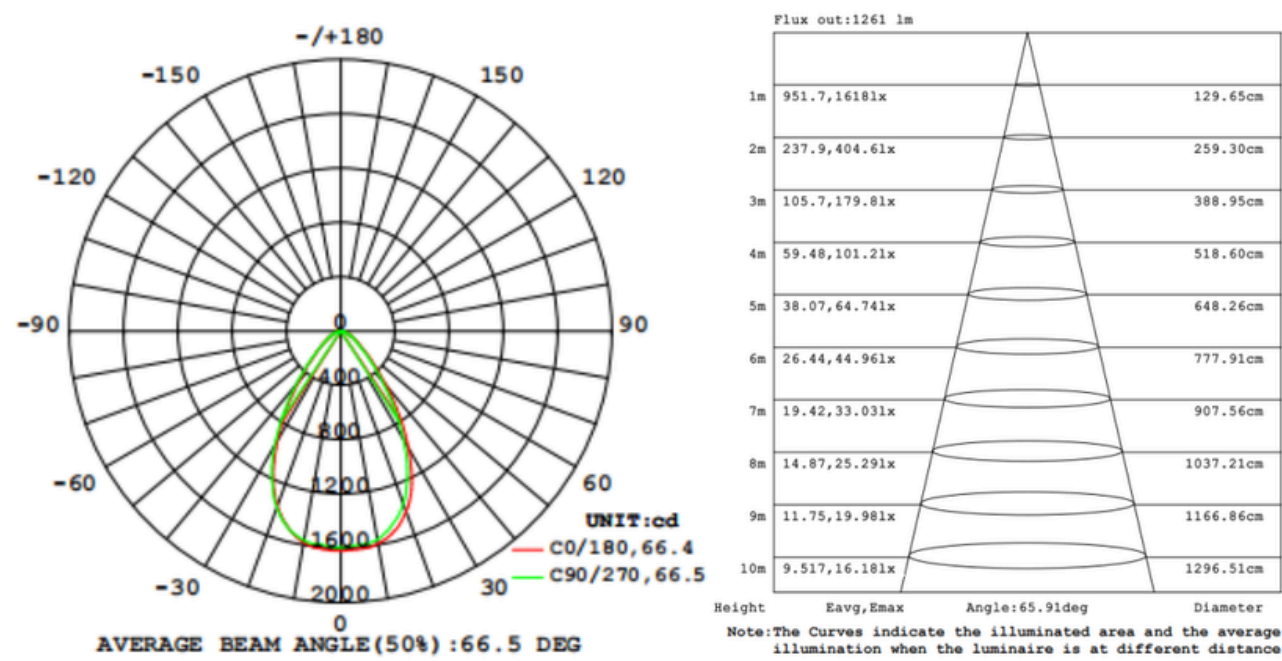

Power: 20W
Beam angle: 60°
Luminous flux: 2065lm
Central light intensity: 1618cd

Optional accessories



We reserve the right to change our product specifications. For latest information, please visit www.lucretia.com.au. For additional questions about the product, please email us through sales@lucretia.com.au.