



## Essential 95 General Architectural Downlight

The Essential 95 is a high-performance architectural downlight by Lucretia, delivering comfortable UGR<19 general illumination, smooth light distribution and refined reflector options for versatile residential, hospitality and commercial applications.

Are you a professional and your project needs some support?


BOOK A CONSULTATION WITH US

### Main Specifications


|                                                                                 |                                                                                             |
|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| <b>Type:</b> General Architectural Downlight                                    | <b>Control Options:</b> Non-Dimmable, TRIAC, DALI and Casambi                               |
| <b>Power Options:</b> 15W                                                       | <b>Input Voltage:</b> 220–240V AC, 50/60Hz                                                  |
| <b>Luminous Flux:</b> 1350 lm                                                   | <b>Dimensions:</b> Ø109 × H53 mm                                                            |
| <b>Luminaire Efficacy:</b> Up to 90 lm/W                                        | <b>Cut-Out:</b> Ø95 mm                                                                      |
| <b>Colour Temperature:</b> 2700K / 3000K / 4000K (Custom CCT Available)         | <b>Construction:</b> Die-cast Aluminium Housing                                             |
| <b>Colour Rendering:</b> CRI >90 (CRI >95 Available)                            | <b>Material:</b> Die-cast Aluminium                                                         |
| <b>Colour Consistency:</b> SDCM <3                                              | <b>Ingress Protection:</b> IP44                                                             |
| <b>Beam Angle:</b> 60°                                                          | <b>Installation:</b> Recessed                                                               |
| <b>Optical System:</b> Uniform Illumination Optical System                      | <b>Customisation:</b> Custom CCT, CRI, Reflector Finish and Control Options Available       |
| <b>Glare Control:</b> UGR <19                                                   | <b>Warranty:</b> 5-Year Warranty                                                            |
| <b>Reflector Finishes:</b> Matte Silver, Chrome, Gold, Gunmetal and Matte Black | <b>Applications:</b> General Lighting for Residential, Hospitality and Commercial Interiors |



Dimensions

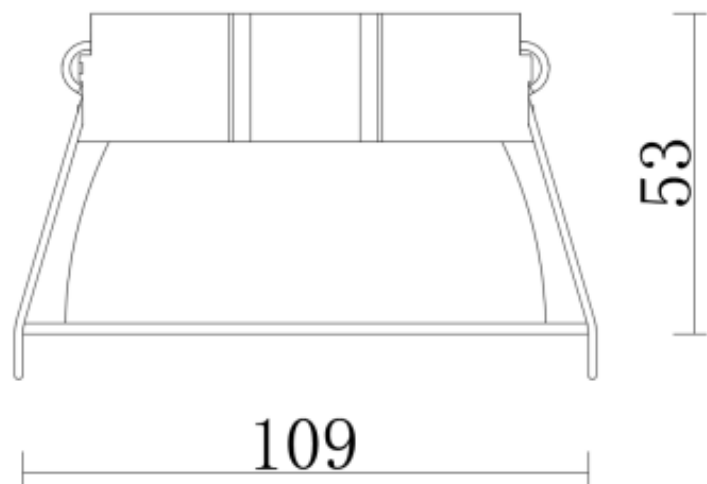

Light Distribution Curve

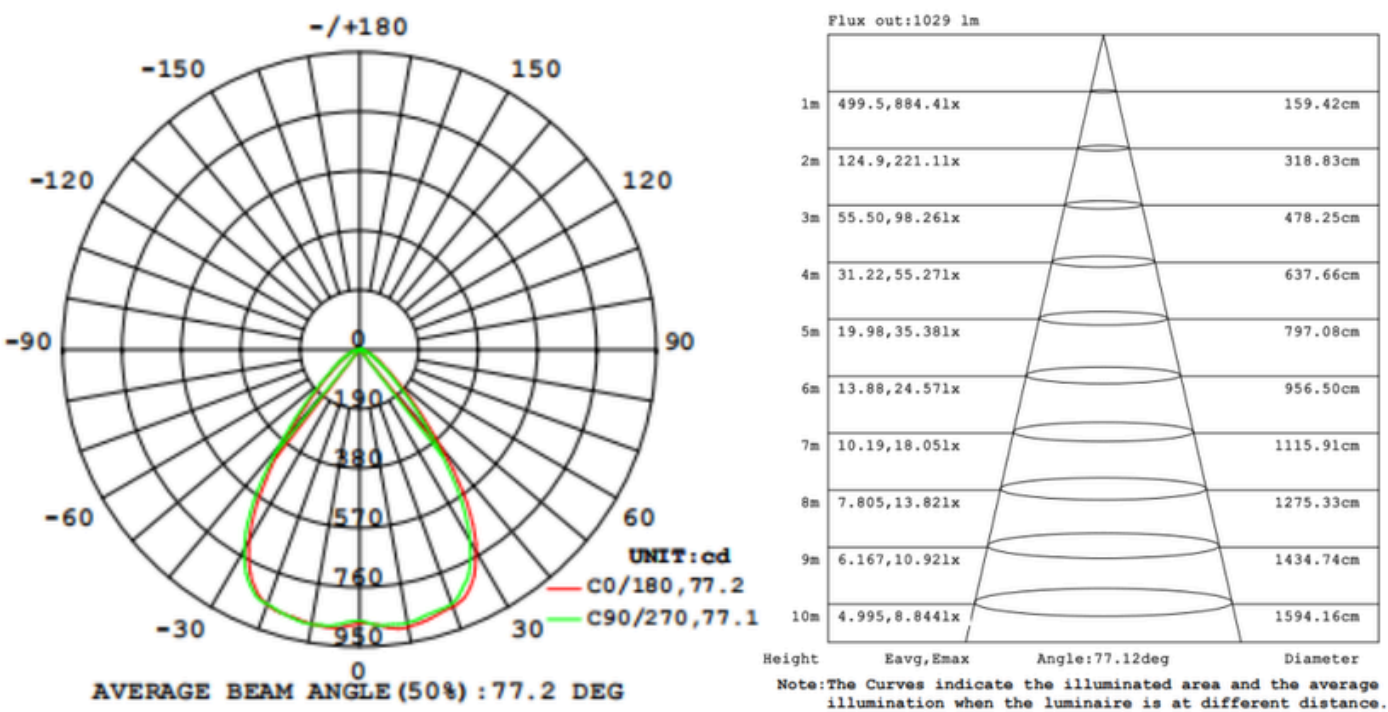

Power: 15W  
Beam angle: 60°  
Luminous flux: 1399lm  
Central light intensity: 901cd

Optional accessories

