

## NOVA 95 Architectural Downlight



The NOVA 95 is a premium architectural downlight by Lucretia, delivering high lumen output, advanced optical control, modular serviceability and exceptional visual comfort for demanding architectural projects.

Are you a professional and your project needs some support?


BOOK A CONSULTATION WITH US

### Main Specifications


|                                                                                                                                          |                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Type:</b> Architectural Recessed LED Downlight                                                                                        | <b>Control Options:</b> TRIAC (Standard) · DALI · 0–10V · Casambi<br>Additional control protocols available on request                     |
| <b>Power Options:</b> 20W · 25W                                                                                                          | <b>Input Voltage:</b> 220–240V AC · 50/60Hz                                                                                                |
| <b>Luminaire Efficacy:</b> Up to 70 lm/W                                                                                                 | <b>Dimensions:</b> Ø110 × H123 mm                                                                                                          |
| <b>Colour Temperature:</b> 2700K · 3000K · 3500K · 4000K<br>Custom CCT available on request                                              | <b>Cut-Out:</b> Ø95 mm                                                                                                                     |
| <b>Colour Rendering:</b> CRI 95+                                                                                                         | <b>Material:</b> Die-cast Aluminium                                                                                                        |
| <b>Beam Angles:</b> 15° · 24° · 36° · 50°                                                                                                | <b>Ingress Protection:</b> IP44                                                                                                            |
| <b>Optical System:</b> NOVA Optical Engine with deep recessed optics, precision reflector, anti-glare lens and optional honeycomb louvre | <b>Serviceability:</b> LED module and driver replaceable without removing the complete luminaire                                           |
| <b>Glare Control:</b> NOVA Visual Comfort System featuring advanced four-layer anti-glare technology                                     | <b>Customisation:</b> Custom beam angles, colour temperatures, reflector finishes and control solutions available for project requirements |
| <b>Light Source:</b> High-performance LED module                                                                                         | <b>Warranty:</b> 5-Year Warranty                                                                                                           |
| <b>Construction:</b> Precision die-cast aluminium housing with integrated thermal management architecture                                | <b>Applications:</b> Luxury Residential · Hospitality · Retail · Gallery · Museum · Commercial                                             |
| <b>Reflector Finishes:</b> Silver · Metallic Black · Matte Black · Matte White. Custom finishes available on request                     |                                                                                                                                            |



Dimensions

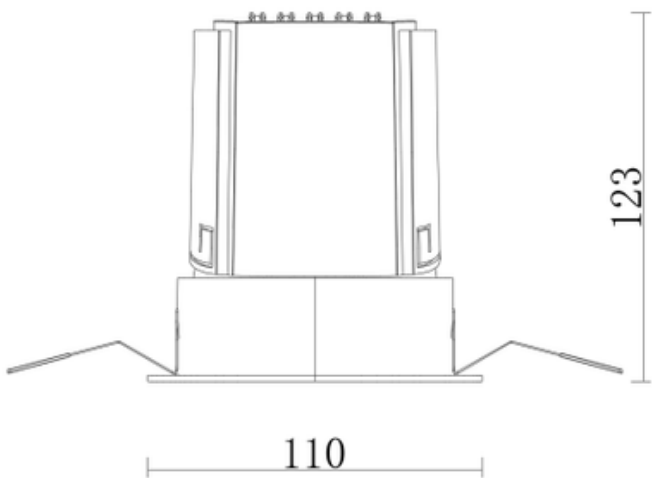

Light Distribution Curve

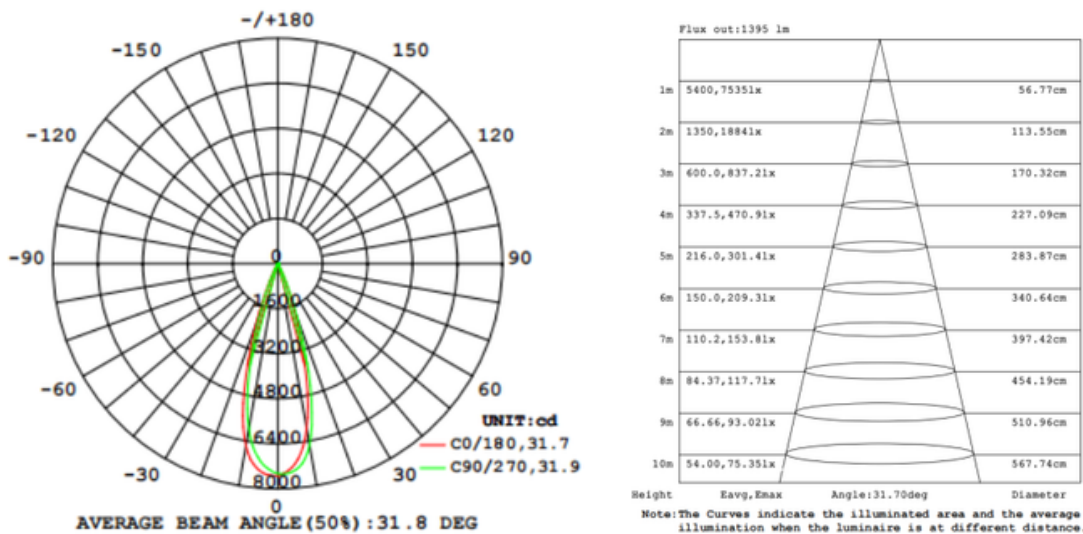

Power: 25W  
Beam angle: 50°  
Luminous flux: 2125lm  
Central light intensity: 7538cd

Optional accessories

