

STAR 75 Architectural Downlight



The STAR 75 is a reliable architectural downlight by Lucretia, combining clean design, efficient illumination, flexible configurations and dependable performance to deliver a practical, high-value lighting solution for residential, hospitality and commercial projects.

Are you a professional and your project needs some support?


BOOK A CONSULTATION WITH US

Main Specifications


Type: Architectural Downlight	Control Options: Non-Dimmable, TRIAC, DALI and Casambi
Power Options: 12W	Input Voltage: 220–240V AC, 50/60Hz
Luminous Flux: 900 lm	Dimensions: Ø84 × H88 mm
Luminaire Efficacy: Up to 75 lm/W	Cut-Out: Ø75 mm
Colour Temperature: 2700K / 3000K / 4000K (Custom CCT Available)	Construction: Die-cast Aluminium Housing
Colour Rendering: CRI >90 (CRI >95 Available)	Material: Die-cast Aluminium
Colour Consistency: SDCM <3	Ingress Protection: IP44
Beam Angle: 50°	Installation: Recessed
Optical System: Precision Reflector Optical System	Customisation: Custom CCT, CRI and Control Options Available
Glare Control: Low Glare Reflector Design	Warranty: 5-Year Warranty
Reflector Finishes: Matte White, Matte Black	Applications: Apartments, Multi-Residential Developments, Offices, Retail, Hospitality and Commercial Interiors.



Dimensions

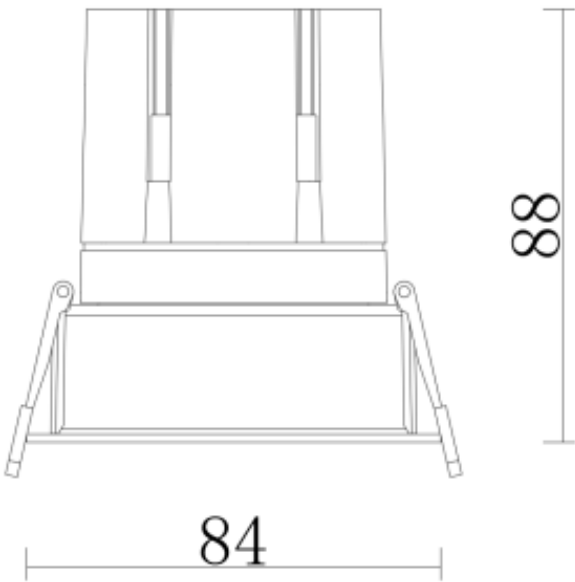


Light Distribution Curve

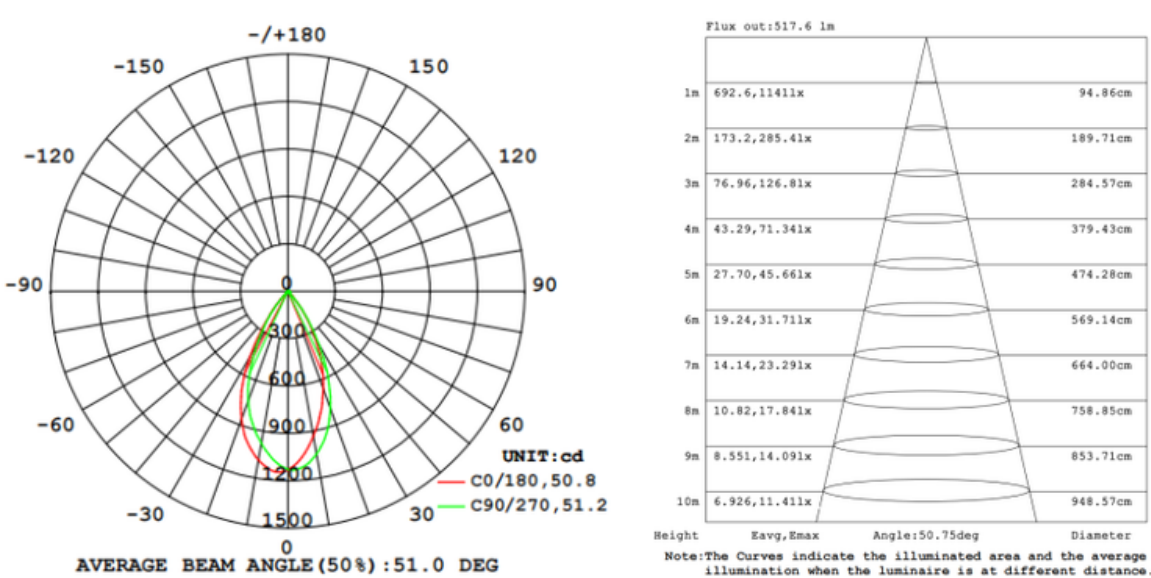

Power: 12W
Beam angle: 50°
Luminous flux: 806lm
Central light intensity: 1146cd

Optional accessories



Mirror gold



Matte silver



Matte white



Matte black



Mirror Black

