

Wall Washer 55 Architectural Downlight



The Wall Washer 55 is a precision architectural downlight by Lucretia, featuring asymmetric optics to deliver smooth, uniform wall illumination, enhanced visual comfort and refined architectural lighting for premium residential, hospitality and commercial spaces.

Are you a professional and your project needs some support?


BOOK A CONSULTATION WITH US

Main Specifications


Type: Architectural Wall Washer Downlight	Input Voltage: 220–240V AC, 50/60Hz
Power Options: 8W	Dimensions: Ø62 × H82 mm
Luminous Flux: 560 lm	Cut-Out: Ø55 mm
Luminaire Efficacy: Up to 70 lm/W	Construction: Die-cast Aluminium Housing
Colour Temperature: 2700K / 3000K / 4000K (Custom CCT Available)	Material: Die-cast Aluminium
Colour Rendering: CRI >90 (CRI >95 Available)	Ingress Protection: IP44
Colour Consistency: SDCM <3	Installation: Recessed
Beam Distribution: Asymmetric Wall Wash	Customisation: Custom CCT, CRI and Control Options Available
Optical System: Precision Asymmetric Optical System	Warranty: 5-Year Warranty
Glare Control: Low Glare Optical Design	Applications: Feature Walls, Galleries, Museums, Hospitality, Retail, Luxury Residential and Commercial Interiors.
Control Options: Non-Dimmable, TRIAC, DALI and Casambi	



Dimensions

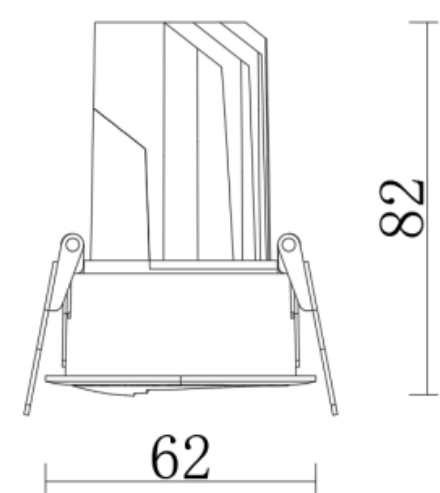

Light Distribution Curve

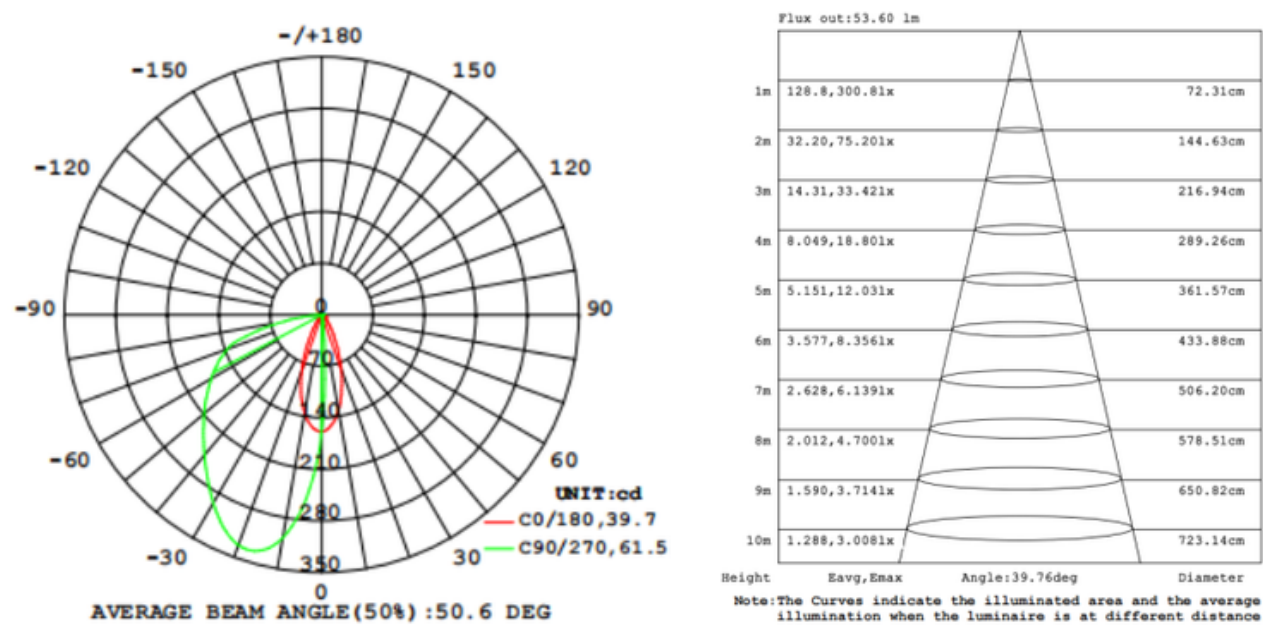

Power: 8W
Beam angle: /
Luminous flux: 338lm
Central light intensity: 334cd

