
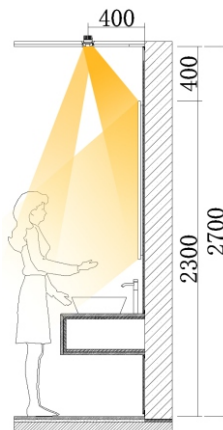


PRODUCT LINE DRAWING

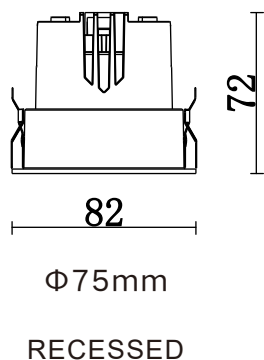

THE LAMP IS 350~450MM FROM THE WALL; THE SPACING BETWEEN THE LAMP AND MIRROR TOP AND THE SPACING BETWEEN MIRROR TOP AND CEILING ARE AT A 1:1 RATIO.

INSTALLATION STATEMENT

1. Read the manual carefully before installation.
2. Have the installation done by a professional electrician.
3. To avoid electric shock, ensure the power is turned off before installation or maintenance.
4. Under no circumstances should the luminaire be covered by thermal pads or similar materials, and there must be at least 100mm of space around the product.
5. If you notice any abnormalities such as smoke or peculiar smell, please cut off the power immediately and have it inspected, repaired or replaced by a professionally qualified person.
6. Keep the manual for future reference.




IP20




CE




1. AS SHOWN IN THE FIGURE, OPEN A SUITABLE INSTALLATION HOLE ON THE CEILING (PLEASE REFER TO THE LAMP BODY LABEL FOR SPECIFIC HOLE SIZE).

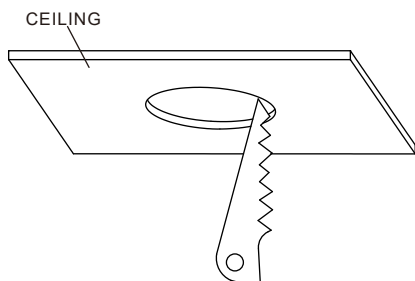

2. CONNECT THE INPUT END OF THE DRIVER TO AC200-240V 50/60Hz.

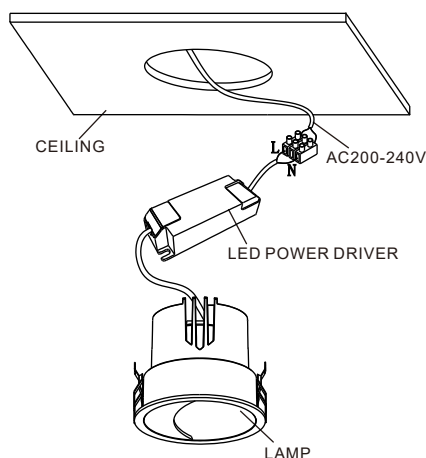

3. PINCH THE SPRING PLATES ON BOTH SIDES OF THE LED LAMP AND INSERT THE LAMP BODY INTO THE OPENING IN THE CEILING.

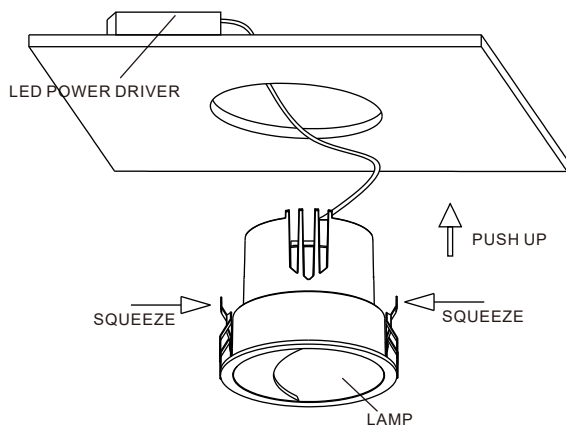

4. AFTER THE LAMP INSTALLATION IS COMPLETED, ADJUST THE IRRADIATION DIRECTION TO MAKE ITS LIGHT FORM A 90° RIGHT ANGLE WITH THE WALL. IT CAN BE USED AFTER POWERING ON.

